


# COMMAND 15R

**PRO  
Range**

The Command 15R is a light, medium-vee RIB suitable for standard road transport. It can be launched quickly and easily for use on rivers and at sea.

This RIB is frequently chosen for rescue missions, military operations and work at sea. It is homologated by Bureau Veritas and in division 222.

Technical Specifications	
Hull length	4.50 m
Inside length	3.35 m
Hull beam	2.10 m
Inside width	1.07 m
Number of chambers	5
Inflation valves	5
Buoyancy tube diameter	0.47 m
Lightship weight	365 kg
Maximum load	675 kg
Full load weight	1,040 kg
Passengers in C	7
Hypalon/Neoprene tube	1,670 dTex
Engine	
Fuel	Petrol
Engine type	Outboard
Drive shaft	Long
Maximum power	60 hp (metric)
Recommended power	40 hp (metric)
Max. engine weight	118 kg
Trailer	

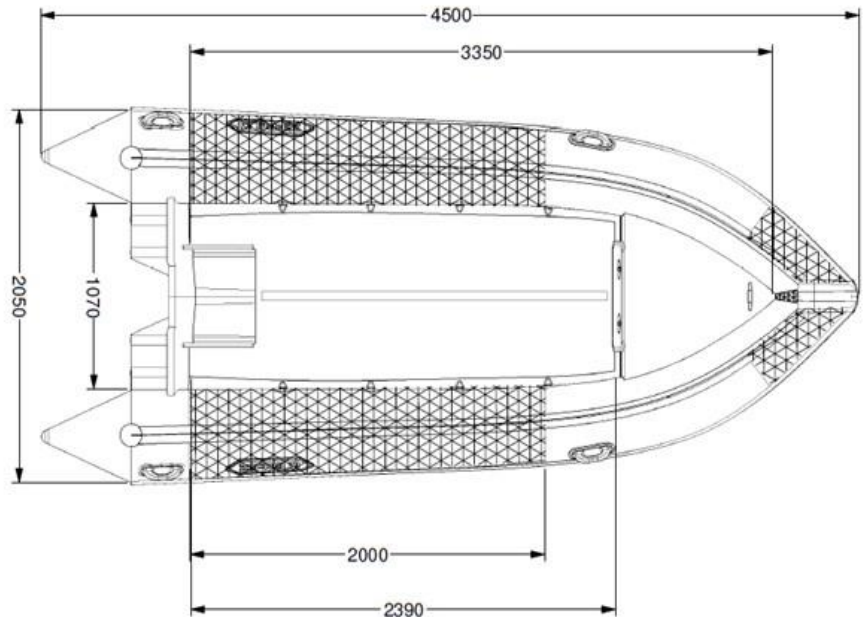

### Included on this model

- Pointed nose
- 1 bow ring
- 2 transom towing rings
- 1 rubber anchor guide
- 4 handles
- Full-length exterior lifeline
- Full-length interior lifeline
- D-section rubbing strake
- High-performance self-bailer
- Bow locker
- Central deck strap
- 2 paddles, repair kit, user manual
- Foot pump and pressure gauge
- Paddle holders
- Cable trough
- Triple nose reinforcement
- Double skinning, 2 metres on each side
- Safety equipment
- Commissioning inspection
- Suzuki DF40ATL outboard